

OPzV Series-Tubular Gel


6 OPzV600(2V600Ah)

Specifications

Rated Voltage	2V	
Nominal Capacity	600Ah	(C ₁₀ , 1.80V/cell)
Dimension	Length	145mm(5.71 in.)
	Width	206mm(8.11 in.)
	Container Height	646mm(25.43 in.)
	Total Height	681mm(26.81 in.)
Approx Weight	46.0Kg (101.41 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	600.0 Ah	(10hr, 60.0A, 1.80V/cell)
	523.0 Ah	(5hr, 104.6A, 1.75V/cell)
	456.0 Ah	(3hr, 152.0A, 1.75V/cell)
	335.0 Ah	(1hr, 335.0A, 1.65V/cell)
Max. Discharge Current (5s)	4800A	
Internal Resistance (25°C)	Approx. 0.62mΩ	
Operating Temp. Range	Discharge	-20°C~55°C (-4°F~131°F)
	Charge	0°C~40°C (32°F~104°F)
	Storage	-20°C~50°C (-4°F~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max. Charging Current (25°C)	150.0A	
Charge voltage (25°C)	Float	2.25V
	Temp. Coefficient	-3mV/cell/°C
	Cycle (Equalization)	2.35~2.40V
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C	



Layout

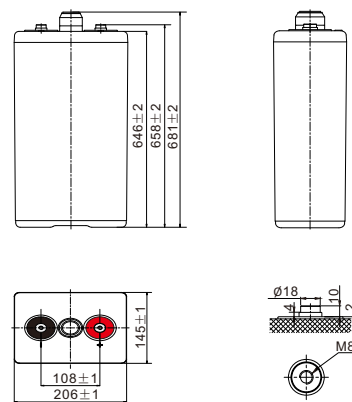

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.85V/cell	409.0	389.0	335.0	267.0	177.0	139.0	95.0	66.0	56.2
1.80V/cell	503.0	470.0	390.0	301.0	195.0	151.0	102.6	71.5	60.0
1.75V/cell	595.0	526.0	416.0	313.0	200.0	152.0	104.6	72.5	60.9
1.70V/cell	668.0	574.0	440.0	325.0	205.0	158.0	105.8	74.0	61.6
1.65V/cell	717.0	607.0	458.0	335.0	209.0	160.0	108.0	74.5	62.3
1.60V/cell	750.0	628.0	469.0	341.0	212.0	162.0	109.0	75.0	62.7

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.85V/cell	761.0	730.0	640.0	517.0	344.0	272.0	185.0	130.0	112.0
1.80V/cell	919.0	871.0	738.0	578.0	376.0	293.9	199.0	139.0	119.0
1.75V/cell	1069.0	962.0	779.0	598.0	385.0	295.0	202.0	141.0	121.0
1.70V/cell	1178.0	1034.0	816.0	617.0	393.0	303.8	205.0	143.0	122.0
1.65V/cell	1243.0	1076.0	840.0	631.0	399.0	307.8	207.0	144.0	123.0
1.60V/cell	1276.0	1098.0	853.0	637.0	402.0	309.8	208.0	145.0	124.0

OPzV Series-Tubular Gel

6 OPzV600(2V600Ah)

Applications

- Telecommunications
- Radio and cellular telephone relay stations
- Emergency lighting systems
- Power stations, Conventional power stations, alternative power (solar, wind)
- Large UPS and computer back-up
- Railway signaling
- Maritime standby power on ships and ashore
- Process and control engineering
- Standby power
- Buoy lighting


General Features

- 20 years design life (20°C)
- Better recovery performance
- Wide working temperature range (-20~55)°C
- No electrolyte stratification provides longer service life
- High recombination efficient
- Built in copper core based in lead will carry large current
- Separator imported from AMER-SIL high porosity. PVC-SiO₂ and low resistance
- Pasted negative plate special grid design increase the active material. availability large current discharge and charge ability
- Tubular type positive plate (polyester tube) prevent the active material from falling. Multi metal alloy pressed positive grid increase the anti corrosion ability and service life


Standards

- Compliance with IEC 60896, IEC 61427, DIN 40742 standards
- UL, CE Certified
- Manufactured in Leoch® IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


Charge voltage vs ambient temperature curve

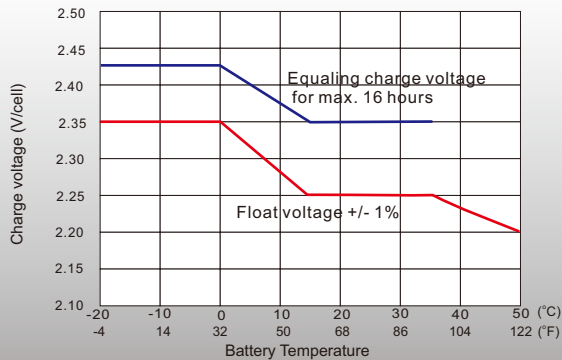

Temperature effects in relation to battery capacity

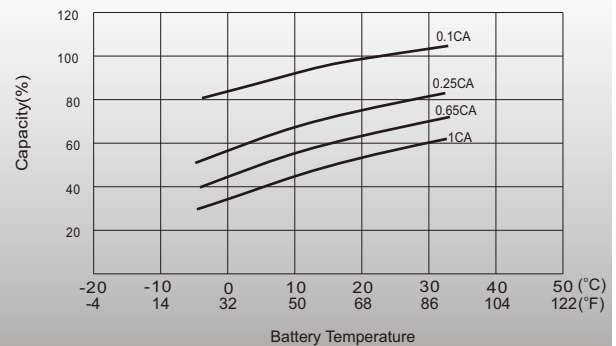

Cycle Life in Relation to DOD

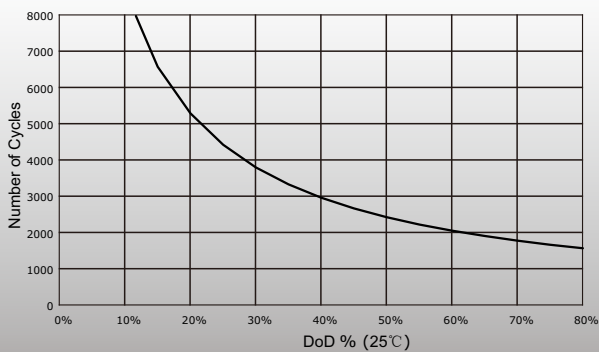

General Relation of Capacity VS. Storage Time

