


LB-Series DAC (Data Acquisition Case) Specifications

Battery Types:	VRLA, VLA, NiCad
Battery Cell Voltages:	Standard: 1.2V, 2V, 6V, 12V Optional: Custom voltages available upon request
Voltage Accuracy:	1.2V: 0.8% 2V: 0.5% 6V: 0.5% 12V: 0.5%
Resolution:	0.001 VDC
Communication:	Wireless 433 Mhz
Wireless Range (to Load Bank):	50 m (165 ft)
Power Requirements:	1.2V: 8 VDC from first 9 cells 2V: 8 VDC from first 9 cells 6V: 8 VDC from first 3 cells 12V: 8 VDC from first 3 cells
Upper Voltage Limit	60 VDC
Dimensions	127 x 114 x 38 mm (5 x 4.5 x 1.5 in)
Weight	272 g (9.6 oz)



Front

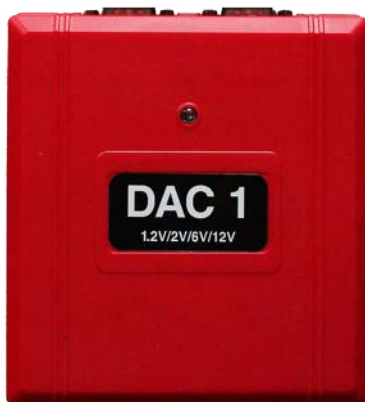

Back



Top