

BC-2200 MODULAR FLOAT BATTERY CHARGER AND POWER SUPPLY

Eagle Eye's BC-2200 Float Battery Charger and Power Supply is based on a modular, redundant platform design. It utilizes high availability with uptime architecture. Available in 400W with hot-swappable Intelligent Power Modules (iPMs), the BC-220 is available at the following ratings: 12VDC 400W, 20 A (Max), 20 A (Rated) and 24VDC, 400W, 10 A (Max), 10 A (Rated). The BC-2000 features industrial construction and is available in 2, 4-slot chassis options..

Product Advantages

- Hot Swappable Intelligent Power Modules (iPMs))
- High Availability / Uptime Architecture
- Natural Convection Cooled (No Fans)
- Remote Voltage Sensing
- Low DC output ripple
- Universal AC input
- Battery temperature compensation with controlled limits
- Ethernet Communication Standard
- High Efficiency and CE Compliant



APPLICATIONS


- Utility
- Switchgear
- Process Control
- Other Industrial Applications

BC-2200 KIT

- 30 ft. remote temperature sense cable
- 30 ft. remote voltage sense cable
- Mounting rack

Web-Based Software Information

- Internal web server uses a modern, responsive framework for attractive display on smart phones and tablets
- Access on any desktop PC or laptop via web browser
- View all measured parameters in real-time
- Log up to 10,000 history records, downloadable to a CSV file
- Ethernet communication standard for field or remote monitoring

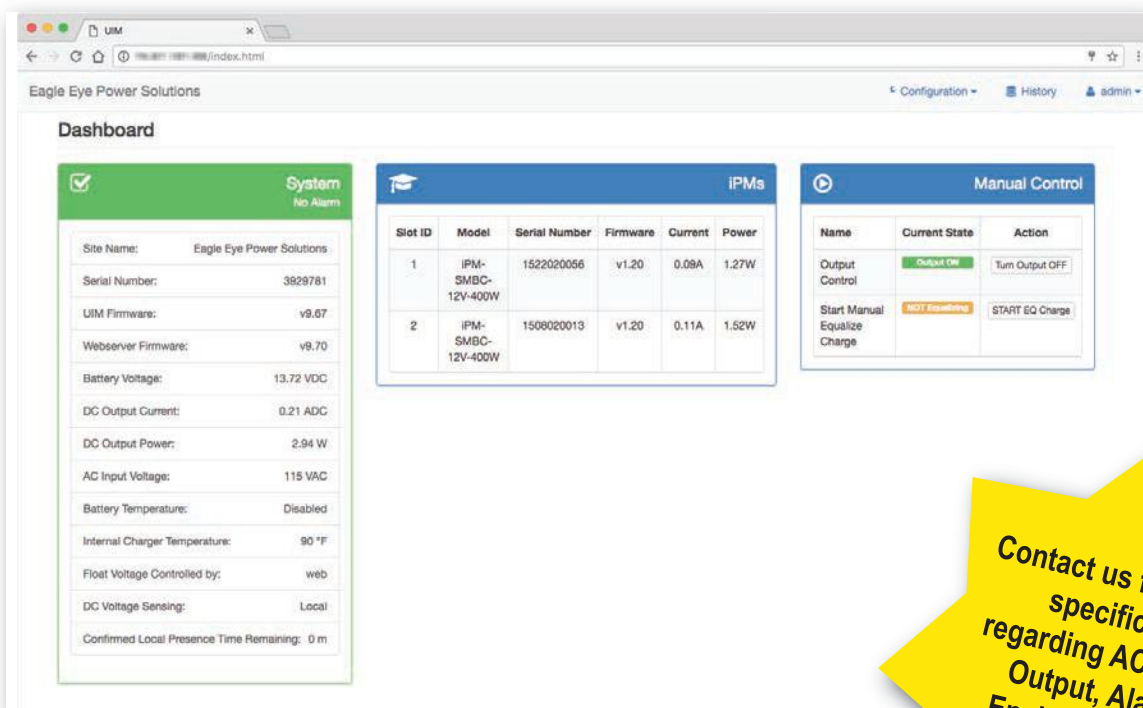

Ordering Information

MODEL NUMBER
BC-2200

DESCRIPTION
Modular Float Battery Charger & Power Supply: 12 or 24 VDC

Contact us for technical specifications regarding AC Input, DC Output, Alarming, Environmental, and User Interface