




GFL-1000 PORTABLE GROUND FAULT LOCATOR FOR DC SYSTEMS ONLY

Used as an essential instrument to pinpoint faulty grounding where electrical cables have breakage and loss to the ground, the Eagle Eye GFL-1000 Portable Ground Fault Locator provides accurate solutions for troubleshooting and preventative maintenance. It is designed to fast-detect, track and locate grounding faults for both online and offline DC systems. With its compact and rugged design, the GFL-1000 is easy to use in small places and harsh environments working hard to increase the reliability of your electrical equipment.

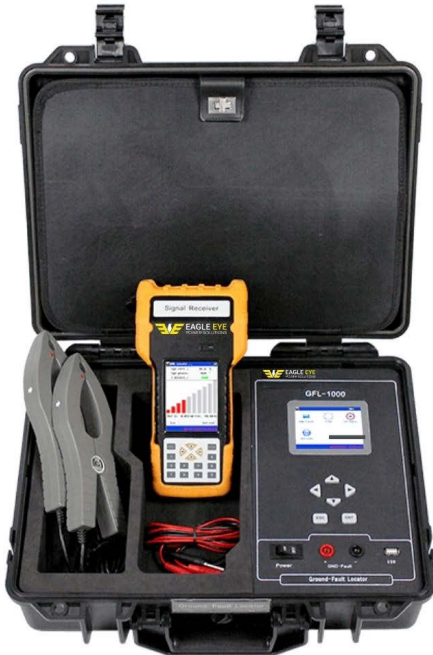

Product Advantages

- Patented technology that pinpoints current leakage faults with grounding resistance lower than 1MΩ
- Analyzes the interference signal in the circuit using waveform analysis
- Wide output voltage range
- Built-in band pass filter to bypass different interference signals
- Reflects the aging status which reduces maintenance and repair costs

APPLICATIONS

- **Railway and Transit:** Signal, communication and locomotive electric equipment
- **Power Utility:** DC system with faulty grounding
- **Industrial Facilities:** Electric safety equipment for general power distribution applications
- **Telecommunication:** Electronic equipment with faulty grounding

GFL-1000 KIT

- GFL-1000 Generator Power Adapter
- 2 Signal Testing Leads
- 2 Alligator Clips
- Punctuation Clip
- Signal Retriever
- 2 Dual-Range Current Detectors
- 2 Batteries
- 120/220 50/60 Hz Battery Charger

Technical Specifications

Output Voltage	24, 48, 110, 220, 500, 1000 VDC
Output Frequency	10 Hz
Output Current Limitation	5 mA or unlimited (Max 25 mA)
Fault Location Sensitivity	$\leq 1 \text{ M}\Omega$
Current Detect Sensitivity	AC/DC Circuit: $\geq 0.5 \text{ mA}$
Quick Search Clamp	55 mm (diameter), 60 mm (jaw opening)
Current Sensor	$\phi 8$ and $\phi 20$
Jaw Opening	60 mm (2.36 in)
Display	Backlit Color LCD
Operating Environment	Temperature: $-5 - 40^\circ\text{C}$ ($23 - 104^\circ\text{F}$)
Power Requirements	8.4 VDC Li-ion Battery
Dimensions	360 x 260 x 135 mm (14.2 x 10.2 x 5.3 in.)
Weight	7 kg (15.4 lbs.)

Ordering Information

MODEL NUMBER

GFL-1000

DESCRIPTION

Range: 24-1000V, 10 Hz