

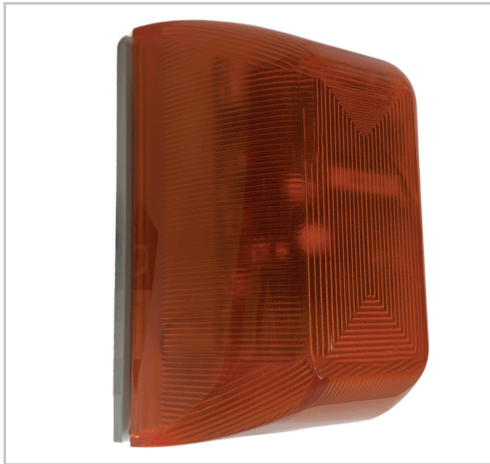


HGD-AAB Audible / Visual Alarm Beacon

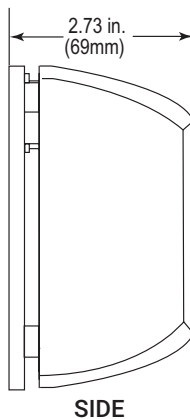

HGD-AAB-A

HGD-AAB Dimensions

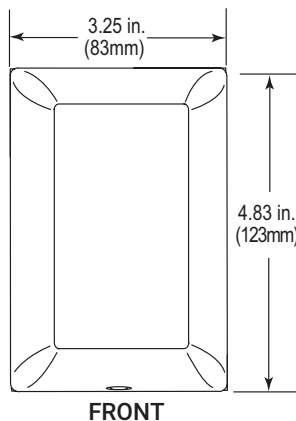

Product Description

The **HGD-AAB** is a remote visual and audible alarm beacon designed for use with the HGD series of products, including the HGD-5000 detectors and the HGD-5000-R repeater panel. The HGD-AAB offers a highly effective way to alert of a hazardous situation prior to entering the room. The HGD detection products feature integral alarm buzzers, but the HGD-AAB offers redundancy and alarm in remote locations.


Product Features

- Offers 32 different tones
- Includes 10 high density LEDs
- For indoor use only, see HGD-AAB-WC for a weatherproof cover
- Low power consumption which allows for multiple strobes from one HGD-5000
- Durable polycarbonate construction
- Made in the USA

Additional Color Models Available

Wiring to HGD-5000 and HGD-5000-R

The Strobe connection provides 12V DC (504mA max) output power to an external strobe and will activate when the Hydrogen level reaches 2% Vol. The HGD-5000-R is capable of powering up to four (4) HGD-AAB alarm strobes.

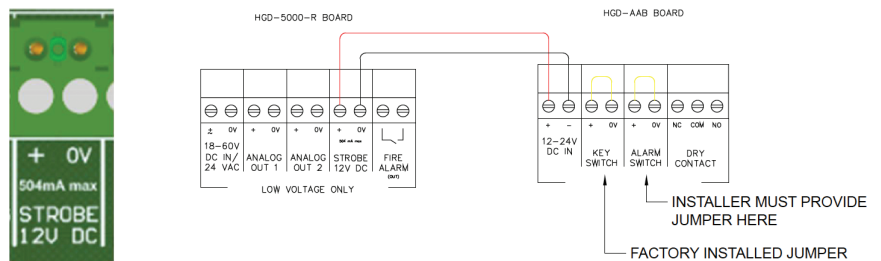

Accessory Items



HGD-AAB-WC Weatherproof Cover

The HGD-AAB is a remote visual and audible for use with the HGD series of products.

Technical Specifications	
Operating Voltage	12-24VDC
Power Consumption	Stand by: 50µA Siren low volume: 85mA Siren high volume: 90mA Strobe: 25mA
Siren Volume (selectable)	Low: 85 dB at 1' High: 100 dB at 1'
Alert Tone	32 selectable sounds